




## Setting new standards for compact home theatre

Forming the basis of a completely revised Mini Theatre concept, the new M-1 combines a cleaner aesthetic with dramatically improved performance. Combine it with either the ASW608 or the new PV1D subwoofer to create a home theatre experience with superb integration and impressive power for such a discreet system. Plus, its more extended bass response allows M-1 to be used on its own for two-channel applications. Mount the speaker as shown on a table or shelf. Alternatively, a bracket is included for wall mounting and a floor stand is available as an optional extra.



## Technical Specifications

<b>Technical features</b>	Nautilus™ tube loaded tweeter with aluminium dome Woven glass fibre cone bass / midrange
<b>Description</b>	2-way vented-box system
<b>Drive units</b>	1x 25mm (1in) aluminium dome high-frequency 1x 100mm (4in) woven glass fibre cone bass / midrange
<b>Frequency range</b>	-6dB at 55Hz and 50kHz
<b>Frequency response</b>	64Hz - 23kHz ±3dB on reference axis
<b>Dispersion</b>	Within 2dB of reference response Horizontal: over 60° arc Vertical: over 10° arc
<b>Sensitivity</b>	85dB spl (2.83V, 1m)
<b>Harmonic distortion</b>	2nd and 3rd harmonics (90dB, 1m) <1% 120Hz - 30kHz
<b>Nominal impedance</b>	8Ω (minimum 4.0Ω)
<b>Crossover frequency</b>	4kHz
<b>Recommended amplifier power</b>	20W - 100W into 8Ω on unclipped programme
<b>Max. recommended cable impedance</b>	0.1Ω
<b>Dimensions</b>	Height: 248mm (9.8in) Width: 114mm (4.5in) Depth: 162mm (6.4in) Mounted on table stand
<b>Net weight</b>	2.3kg (5lb)
<b>Finishes</b>	Cabinet: Matte Black or Matte White Grille: Matte Black or Matte White perforated steel to match

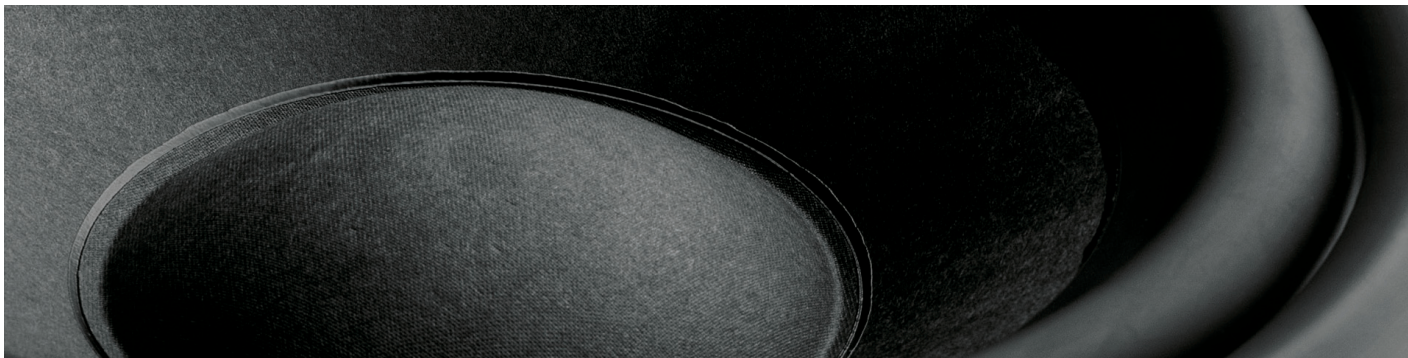

## Power and Control

Providing the bass channel in your surround sound set up, the award-winning ASW608 offers extraordinary power and control for such a compact subwoofer. Even better, it integrates beautifully with the M-1 satellites, creating a coherent, seamless soundscape. Ultra-solid construction and a Class D amplifier deliver maximum bass precision and minimum deformation.



## Technical Specifications

Description	Active closed-box subwoofer system	
Drive unit	1x ø200mm (8 in) paper/Kevlar® cone long-throw	
Frequency range	-6dB at 23Hz and 25/140Hz adjustable (EQ at A)	
Frequency response	±3dB 32Hz – 40/140Hz adjustable (EQ at A)	
Bass Extension	-6dB at 23Hz (position A) -6dB at 28Hz (position B) -6dB at 36Hz (position C)	
Low-pass filter	Active 4th-order, variable cut-off frequency	
Amplifier	Power output: 200W Rated power consumption: 40W/ 0.5W standby Impedance: 33kΩ Signal/noise: >90dB Functions: Volume level – line in Volume level – speaker in Low-pass filter frequency Low-pass filter bypass (line in only) Bass extension Bass roll-off alignment Auto sense on/standby Phase switch Inputs: Line In (RCA Phono) Speaker in (Binding post) 12v trigger (3.5mm jack)	
Dimensions	Height	260mm (10.2 in) no feet
	Width	260mm (10.2 in)
	Depth	330mm (13 in) including grille and controls
Weight	8.85kg (19.5 lb)	
Finishes	Matte Black or Matte White	